

Towed Vehicle Battery Maintainer

Part No: 39332

Step 1

Attach black Towed Vehicle Battery Maintainer wire to the towed vehicle's positive (+) battery terminal. **(A)**

Step 2

Run the red wire to the towed vehicle's connector, usually located at the front bumper. Either a 6 or 7-way connector is needed. **(B)** (If you do not have a connector we recommend Hopkins Towing Solutions Endurance Connectors, part number 48480 or 48420.)



Step 3

Secure red wire assembly to a 12 volt source, commonly found on the auxiliary (AX) terminal on the connector. Be sure to follow connector instructions. Wire by function only.

Step 4

Use nylon-cable ties to keep wires and battery charger module out of the way of moving parts.

If you have questions, please call 1-800-470-2287.

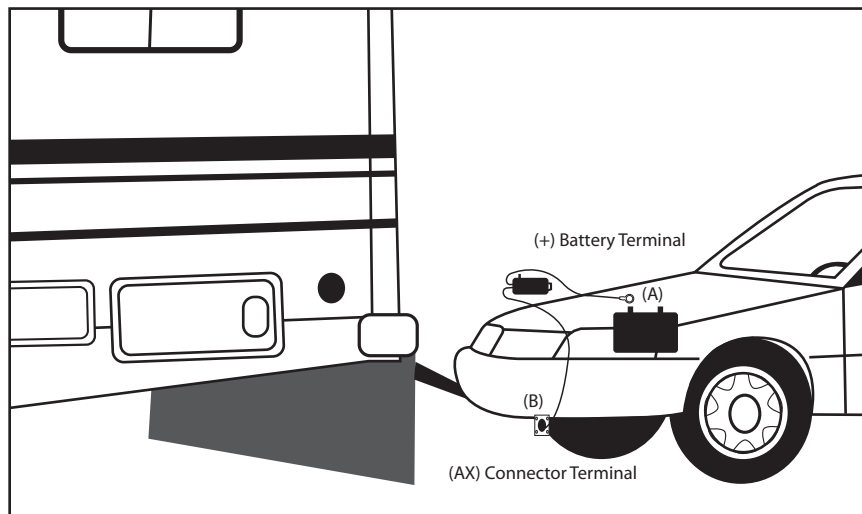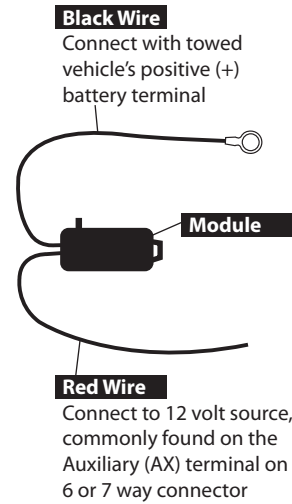

© 2008 Hopkins Manufacturing Corporation • 428 Peyton • Emporia, KS 66081
(620) 342-7320 • www.brakebuddy.com • www.hopkinsmfg.com
311-0288-070 Rev. A 10/08